


## CURVE A 90° PN 6 - SERIE UNO

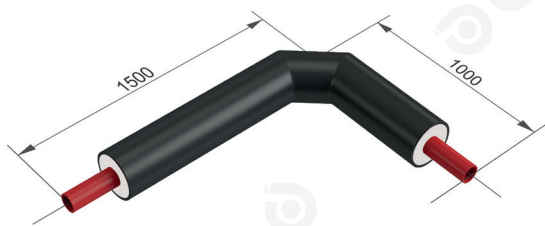

### ECOPEX® UNO - RISCALDAMENTO PN 6 - ISOLAMENTO STANDARD

Tipo [mm]	PE-Xa Pipe				PE Casing		Peso curva [kg]
	DN/pollici	d <sub>int</sub> [mm]	s [mm]	d <sub>ext</sub> [mm]	D <sub>e</sub> [mm]	s <sub>p</sub> [mm]	
25/75	20 - 3/4"	20,4	2,3	25	75	3,0	2,30
32/75	25 - 1"	26,2	2,9	32	75	3,0	2,50
40/90	32 - 1" 1/4	32,6	3,7	40	90	3,0	3,47
50/110	40 - 1" 1/2	40,8	4,6	50	110	3,0	4,92
63/125	50 - 2"	51,4	5,8	63	125	3,0	6,50
75/140	65 - 2" 1/2	61,4	6,8	75	140	3,0	8,47
90/160	80 - 3"	73,6	8,2	90	160	3,0	11,40
110/160	100 - 4"	90	10	110	160	3,0	14,23
125/180	125 - 5"	102,2	11,4	125	180	3,0	18,75
140/200	140	114,6	12,7	140	200	3,2	21,00
160/250	150 - 6"	130,8	14,6	160	250	3,6	30,75

### ECOPEX® UNO - RISCALDAMENTO PN 6 - ISOLAMENTO PLUS

Tipo [mm]	PE-Xa Pipe				PE Casing		Peso curva [kg]
	DN/pollici	d <sub>int</sub> [mm]	s [mm]	d <sub>ext</sub> [mm]	D <sub>e</sub> [mm]	s <sub>p</sub> [mm]	
25/90	20 - 3/4"	20,4	2,3	25	90	3,0	2,50
32/90	25 - 1"	26,2	2,9	32	90	3,0	2,80
40/110	32 - 1" 1/4	32,6	3,7	40	110	3,0	3,80
50/125	40 - 1" 1/2	40,8	4,6	50	125	3,0	5,50
63/140	50 - 2"	51,4	5,8	63	140	3,0	7,20
75/160	65 - 2" 1/2	61,4	6,8	75	160	3,0	9,90
90/180	80 - 3"	73,6	8,2	90	180	3,0	13,00
110/180	100 - 4"	90	10	110	180 (200)	3,0	16,50