


Y BRANCH HEATING 6 BAR

ECOPEX® DUO - ECOPEX® UNO

Pipe UNO ECOPEX® [mm]	DN [mm]	Ø D [mm]	Pipe DUO ECOPEX® [mm]	Ø C [mm]
2 x 25/75	20	75	25+25/90	90
2 x 32/75	25	75	32+32/110	110
2x40/90	32	90	40+40/125	125
2x50/110	40	110	50+50/160	160
2x63/125	50	125	63+63/180	180
2x75/140	65	140	75+75/200	200

Y BRANCH HEATING 6 BAR

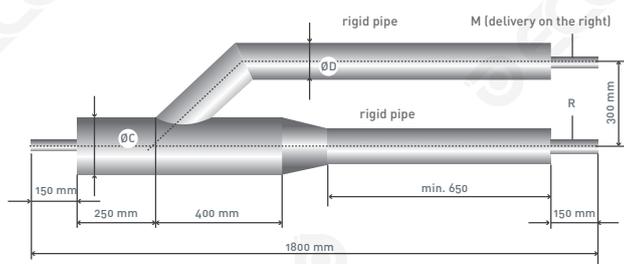

ECOPEX® DUO - 2 steel UNO pipes

Stainless UNO pipeline [mm]	DN [mm]	Ø D [mm]	pipeline DUO ECOPEX® [mm]	Ø C [mm]
26,9 - 90 33,7 - 90	20 25	90 90	25 + 25/90 32 + 32/110	90 110
42,4 - 110 48,3 - 110	32 40	110 110	40+40/125 50+50/160	125 160
60,3 - 125	50	125	63+63/180	180
76,1 - 140	65	140	75+75/200	200

Nota: with UNO pipe the direction of the delivery flow (M) is always on the right, with DUO pipe is always below.